



HK-1800

It provides a warm breeze with little noise, which is perfect for children and places requiring quiet space. It is equipped with brushless motors, which last a lifetime thus removing the need to change any brushes. This conventional hand dryer uses warm air, giving the warmth appreciated in cold winters. HK-1800 hand dryer is available in both automatic and push button models.



CONVENTIONAL RANGE

Why HK-1800?

Specs

 most economical

 heater assembly 1700W

 automatic or push button

 1.8 kW

 IP21/IP23 (optional)

Design

 sensing range adjustment

 anti-disturbance

 blue action light

 five different cover design

In Use

 30-35 seconds drying time

 quiet operation


 three safety protections

 60s timing protection

 easy to clean

 easy maintenance


Specification

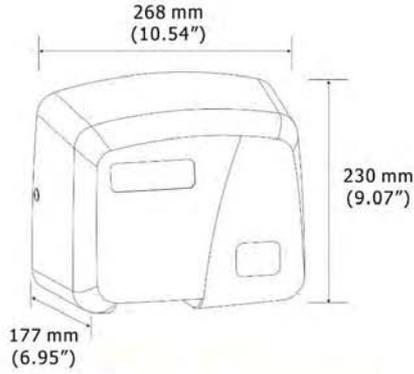


Model Name HK-1800PA
Cover Material ABS
Operation Automatic



Model Name HK-1800PS
Cover Material ABS
Operation Manual

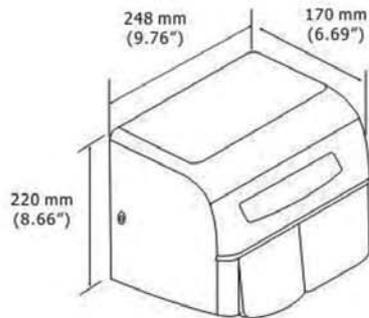


Model Name HK-1800EA
Cover Finish Painted Cast
Cover Material Aluminum
Operation Automatic

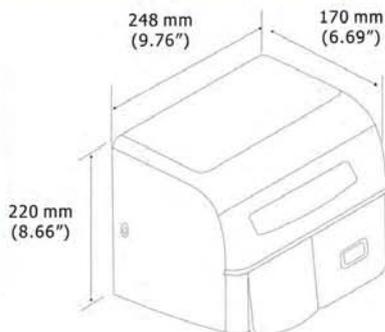


Model Name HK-1800ES
Cover Finish Painted Cast
Cover Material Aluminum
Operation Manual




Specification

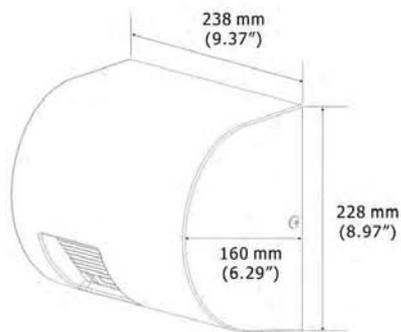


Model Name	HK-1800SRA
Cover Finish	Satin
Cover Material	Stainless Steel (#304)
Operation	Automatic

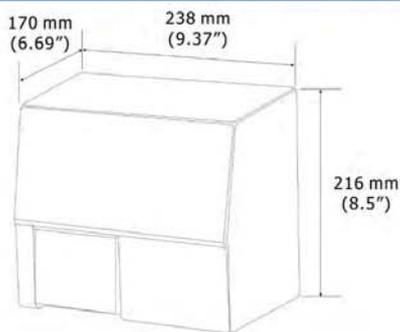


Model Name	HK-1800SA
Cover Finish	Satin
Cover Material	Stainless Steel (#304)
Operation	Automatic

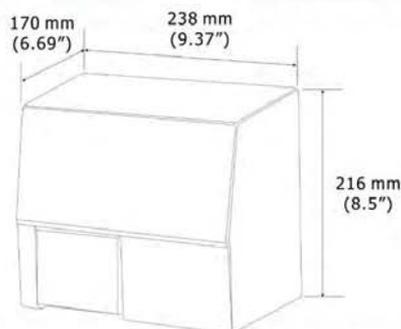

Model Name	HK-1800SA(F)
Cover Finish	Satin
Cover Material	Stainless Steel (#304)
Operation	Automatic

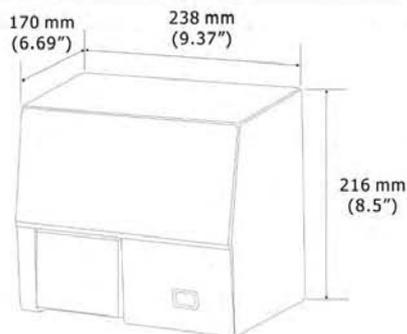

Model Name	HK-1800SS
Cover Finish	Satin
Cover Material	Stainless Steel (#304)
Operation	Automatic

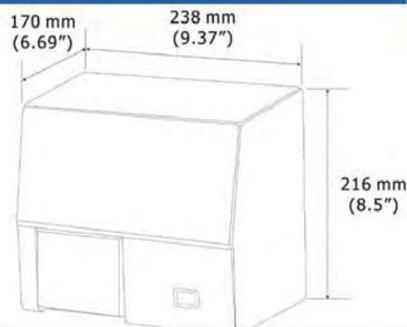

Model Name	HK-1800SS(F)
Cover Finish	Satin
Cover Material	Stainless Steel (#304)
Operation	Automatic



Specification

Packaging (carton)	HK-1800PA/PS: 4 dryers/carton. Gross weight 17kg. Measurement 2.5' HK-1800EA/ES: 4 dryers/carton. Gross weight 23.8kg. Measurement 3.1' Other models: 4 dryers/carton. Gross weight 26.5kg. Measurement 3.1'
Drying Time	Less than 30-35 seconds
Operating Voltage	110V-120Vac, 50/60 Hz, 1.8-2.2kW 220V-240Vac, 50/60 Hz, 1.8-2.2kW
Motor Wattage	100W
Standby Power	1.5W
Air Speed	20.5m/s
Sound Level	HK-1800SRA: 70dB@1m Other Models: 64dB@1m
Sensing Range	170 mm ± 20 mm, Adjustable
Drip Proof	IP21/IP23 (optional)
Timing Protection	60 seconds auto shut off
Motor Thermal Protection	Auto resetting thermostat turns unit off, 105°C(221°F)
Heater Thermal Protection	Auto resetting thermostat turns unit off at 85°C(185°F) Thermal fuse cuts unit off at 142°C(288°F)

Safety Approvals



WEEE RoHS

