
dyson airblade V

TECHNICAL SPECIFICATION





REAR ELEVATION SIDE ELEVATION

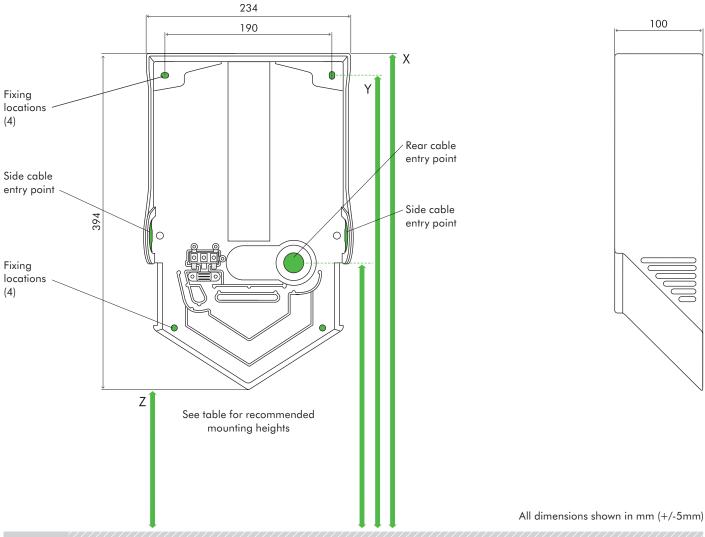

5		

Recommended installation heights from floor						
Male	X 1324mm	Y 1300mm	Z 930mm			
Female	X 1289mm	Y 1265mm	Z 895mm			
Child or disabled	X 1074mm	Y 1050mm	Z 680mm			
Child 5-8	X 952mm	Y 928mm	Z 558mm			
Child 8-11	X 1052mm	Y 1028mm	Z 658mm			
Child 11-14	X 1132mm	Y 1108mm	Z 738mm			
Machine dimensions						
Height 394mm Width 234mm	Depth 100mm					

Minimum clearance				
220mm clearance either side and 30mm above machine.				
Cable entry point from floor				
Male	1089mm			
Female	1054mm			
Child or disabled	839mm			
Child 5-8	717mm			
Child 8-11	817mm			
Child 11-14	897mm			

dyson airblade V



Electrical

Input voltage/Frequency: 220-253V 50 Hz

Rated power: 1600 W

Motor type: Dyson digital motor – brushless DC Motor

Motor switching rate: 6,000 per second

Motor speed: 90,000 rpm

Operating temperature range: 0°- 40°C

Heater type: None

Standby power consumption: Less than 0.5 W

Construction

Casing construction: Polycarbonate casing

Antibacterial coating type: AB08 (Sprayed nickel) contains antibacterial additive in paint. AB08 (White) contains antibacterial moulded additive. Can help prevent the growth of bacteria.

Colour finish: AB08 Sprayed nickel moulded plastic.

AB08 White moulded plastic.

Back plate/mounting bracket construction: ABS/PBT Plastic

Exterior screw type: Anti-tamper M4 Pin-Hex

Water ingress protection to IP24

Filter

HEPA filter (Glass fibre and fleece prelayer)

Bacteria removal 99.9%

Operation

Proximity capacitive sensor. Touch free operation.

Hand dry time measurement: 10 seconds

(Measurement based on National Sanitation Foundation Protocol P.335)

Operation lock-out period: 30 seconds

Airspeed at apertures: 430 mph Operating airflow: Up to 30 l/s

Logistics

Serial number prefix: AB08 (Sprayed nickel) EB5; AB08 (White) EB4

Single unit order code: AB08 (Sprayed nickel) 25882-01;

AB08 (White) 25881-01 Net weight: AB08 2.8kg

Packaged weight: AB08 4.0kg

Packaged dimensions: H145 × W455 × D274 mm

Unit barcode: AB08 (Sprayed nickel) 5025 1550 1572 8;

AB08 (White) 5025 1550 1571 1

Standard guarantee

5 year guarantee



Product range

Sprayed Nickel

White









 $The \, Carbon \, Reduction \, Label \, is \, the \, registered \, trade \, mark \, of \, the \, Carbon \, Trust. \, The \, NSF \, logo \, is \, the \, registered \, trade \, mark \, of \, NSF \, International.$